

WALL PANEL INSTALLATION GUIDELINES

WALL PANEL INSTALLATION

The following installation recommendations are provided by Edelman Leather as a general guide to avoid common errors. Installers should follow best practices for construction and workmanship.

Edelman Leather bears no responsibility for installation or contractor selection. Please contact a Sales Representative if you have any questions, concerns or specific requirements.

Be sure to inspect the panels upon delivery. In case of any product defect or damage in transit please note on the delivery ticket and notify Edelman Leather immediately.

Edelman Leather must be notified within 5 business days; warranty claims, and returns cannot be accepted after any material has been installed.

Materials should be stored in their original packaging in a clean, climate-controlled, free of moisture environment and panels should be left to acclimate at least 48 hours after the original packaging or crates have been opened.

The installation should not commence until building is enclosed and under standard occupancy conditions and surfaces are in acceptable conditions and properly prepared.

While Panels are acclimating, clean the work surface until it is smooth, dry and dust free to obtain the best possible wall preparation. A Level 4 Finish wall preparation should be considered enough.


Z-CLIP INSTALLATION METHOD

Z-Clips are a two-part mechanical fastener used to mount wall panels to a wall. Z-Clips will be factory mounted to the back of the panel(s). Matching wall Z-Track will be supplied with the order in 6 ft (1.8 m) sections. Cut Wall Z-Tracks to length as needed to fit the installation width.

Determine the location and layout where the panel(s) will be mounted to the wall. Mirror mounting locations from panel onto the wall to line up with the Z-Clips on the back of the panels. Create reference lines on the wall to ensure panels will mount plumb and level.

Secure Z-Tracks to the wall using appropriate fasteners. Attached Wall Z-Tracks with appropriate wall screws (not provided) to the wall with bottom aligned to laser level or chalk lines. It is recommended to screw into studs, blocking, or appropriate anchoring.

Slide panel Z-Clips onto Wall Z-Tracks. Panel should be placed on the wall at least $\frac{3}{4}$ " (1.9 cm) higher than desired height and pressed firmly against the wall. Repeat process for multiple panels

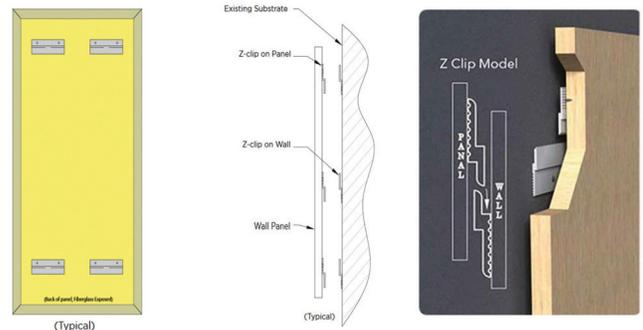

Any deviation from these instructions voids any responsibility by Edelman Leather and may result in an unsatisfactory installation. No warranties expressed or implied, including the implied warranties of merchantability and fitness for a particular purpose, are made by the seller in connection with the sales of any goods. Always follow manufacturer's instructions on recommended products. Any questions regarding the above or during installation, please call us at 860.350.9600.