product overview

Our luxurious leather floor and wall tiles come in many colors, shapes, and sizes — just like your designs.

Add allure, comfort, and unique beauty to any space. Our leather tiles absorb sound, stay cool in summer, keep warm in the winter, and feel soft underfoot. They are also workable, durable, and age with elegance — so feel free to dream big and bold.





smooth colorways



antique smooth colorways

for wall application only



Rust

FT06

Pitch Brown

Very Natural

FT13

crocodile colorways





sophisticated boar colorways



FT02SB



FT03SB



FT04SB



FT05SB



FT06SB





Pitch Brown Very Natural FT12SB FT13SB

rattlesnake colorways













Mud FTS1

Rocks FTS2

Parchment FTS3


Whiskers FTS4


Waterfalls FTS5

Birch Bark FTS6


suggested patterns

ARGYLE











CHEVRON







70 mm x 203 mm L Parallelogram





70 mm x 203 mm R Parallelogram


TROMPE L'OEIL












70 mm x 203 mm L Parallelogram


70 mm x 203 mm R Parallelogram




suggested patterns


CUBED









HARLEQUIN





HERRINGBONE












suggested patterns


ODDFELLOW







PARQUET





PAVIMENTO










suggested patterns


PIAZZA







SQUARES




102 mm x 102 mm



available tiles

SQUARES

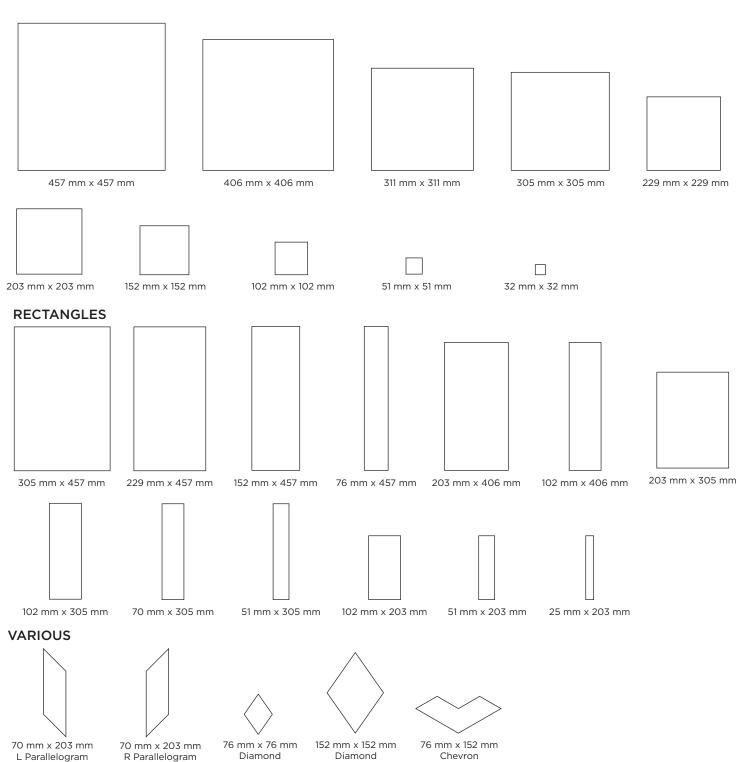



specifications

Content	European full grain vegetable-tanned aniline-dyed cowhide
Finish	Durable protective finish
Thickness	3.0-3.5 mm
Weight Per Square Foot	8.5 oz
Colors Available	32 standard colors
Custom	Custom coloring available
Applications	Residential, Hospitality, Contract, Aviation, Marine, Retail
Use	Vertical and direct applications
Wellness	Greenguard indoor air quality certified
Performance	Recommended for light-traffic areas, light patina

testing

Crocking ASTM D 5053: Class 5 Elongation ASTM D 2211 (20–50%): Complies
Elongation ASTM D 2211 (20-50%): Complies
Light Fastness 72hrs/ISO 105-B02: Class 3-4
Tearing Strength ASTM D 4705 (15lbs): Complies
Boston Fire Code (BFD 1X-1): Complies
California Technical Bulletin 117-2013: Class 1
Cigarette Ignition Resistance (NFPA 260): Class 1
Surface Building Characteristic of Building Materials (ASTM E 84): Class B

maintenance

If a spill or stain should occur, blot immediately with a clean, absorbent cloth or sponge. Do not rub with force or pressure. A drop of saddle soap on a damp cloth may remove dirt.





hide depiction

